




Lesen Sie die Bedienungsanleitung aufmerksam durch und beachten Sie die Hinweise bei der Handhabung des Geräts. Bewahren Sie die Bedienungsanleitung für eine spätere Verwendung auf.

### Sicherheitshinweise

Bewahren Sie sich vor körperlichen Schäden und beachten Sie die Hinweise!

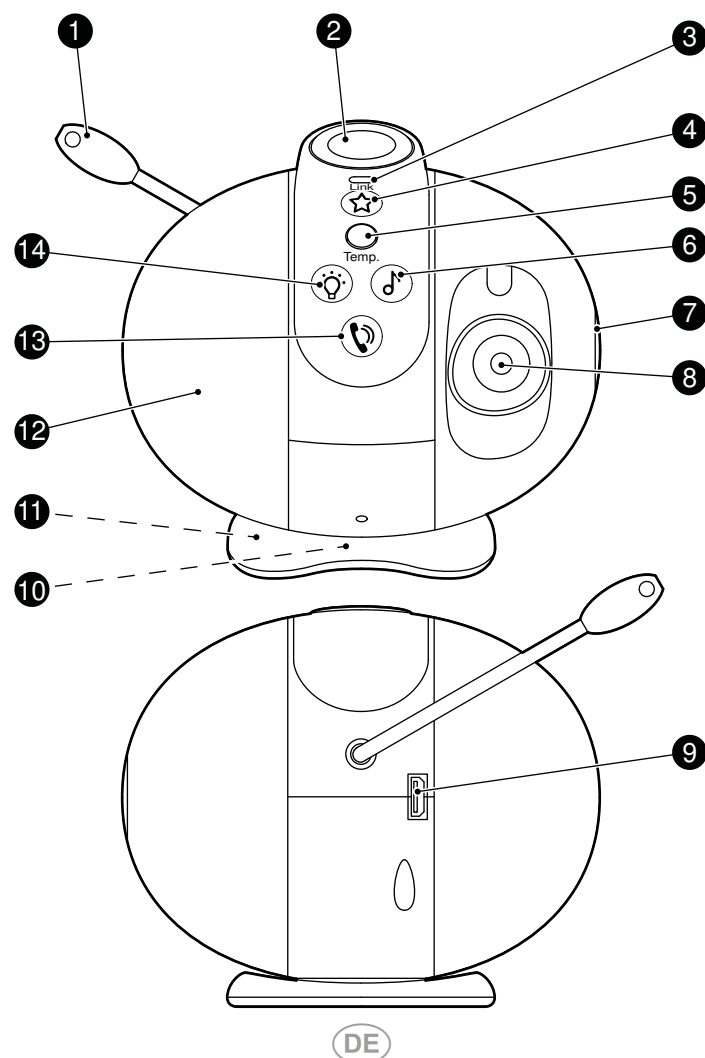

**WARNUNG!** Gefahr eines elektrischen Schlags! Niemals Ihr Gerät oder Komponenten öffnen oder reparieren. Niemals blanke Kontakte mit metallischen Gegenständen berühren. Niemals mit nassen Händen das Netzteil stecken oder lösen.



**WARNUNG!** Erstickungsgefahr! Kinder können Kleinteile, Verpackungs- oder Schutzfolien verschlucken. Halten Sie Kinder vom Produkt und dessen Verpackung fern!



**WARNUNG!** Lebens- und Verletzungsgefahr! Achten Sie bei der Überwachung von Babys oder Kleinkindern darauf, dass das Gerät und das Kabel außer Reichweite des Kindes sind.



**VORSICHT!** Verletzungsgefahr! Das helle Licht des Lichtspiels kann zu Verletzungen der Augen und zur Beeinträchtigung der Sehkraft führen. Durch direktes Hineinsehen könnte es bei Kindern oder vorbelasteten Personen (z. B. durch psychische Krankheiten) unter Umständen zu Beeinträchtigung des Sehvermögens, Augen- und Muskelzucken, Bewusstseinsstörungen, Orientierungsverlust, unfreiwilligen Bewegungen und Krämpfen kommen.

- ▶ Schalten Sie in jedem dieser Fälle das Lichtspiel sofort aus und konsultieren Sie einen Arzt.
- ▶ Halten Sie das Licht des Lichtspiels niemals in die Augen. Leuchten Sie anderen Personen niemals direkt ins Gesicht.



**WICHTIG!** Schützen Sie Ihr Gerät vor Nässe, Staub, Flüssigkeiten, Chemikalien, Dämpfen, Hitze und direkter Sonneneinstrahlung. Ihr Gerät ist nicht wasserdicht, halten Sie Ihr Gerät trocken.

**WICHTIG!** Verwenden Sie ausschließlich das Originalzubehör. Schließen Sie nur vom Hersteller freigegebenes Zubehör an.

### Verpackungsinhalt

Prüfen Sie den Verpackungsinhalt Ihres Babyphones, bevor Sie Ihr Babyphone in Betrieb nehmen. Sollte etwas fehlen oder beschädigt sein, wenden Sie sich an unseren Service.

- WLAN-Babyphone BC 2000
- Netzteil
- Montagematerial
- Bedienungsanleitung

### Systemvoraussetzungen

Sie benötigen ein internetfähiges Smartphone/Tablet mit den Betriebssystemen Android (ab 4.4) oder iOS (ab 7) und die aktuellste Version der App **Smart Life**.

Ihr Babyphone muss für die erstmalige Inbetriebnahme mit der App **Smart Life** und dem WLAN Ihres Routers verbunden werden.

Ihr Babyphone und Ihr Smartphone/Tablet müssen im selben WLAN angemeldet sein.

Beachten Sie bei der Auswahl des Montageorts die folgenden Punkte.

- Ihr Babyphone befindet sich innerhalb der Reichweite Ihres kabellosen Heimnetzwerks (WLAN).
- Beachten Sie unbedingt die örtlichen Vorschriften und Gesetze.

### Merkmale

Durch Ihre Funktionen zur Erfassung von Bild und Ton, bietet Ihnen Ihr Babyphone viele Einsatzmöglichkeiten zur Überwachung oder Kommunikation.

Der Einsatz als Nachtlicht, mit Schlafliedern und als Lichtspiel bietet Ihnen viele Möglichkeiten.

Alle Funktionen sind ebenfalls aus der Ferne über die App **Smart Life** von Ihrem Smartphone/Tablet aus steuerbar.

#### Fernzugriff

Verbinden Sie sich aus der Ferne über die App **Smart Life** mit Ihrem Babyphone. Sehen Sie sich das Live-Bild oder aufgezeichnete Aufnahmen an und steuern Sie weitere Funktionen. Steuern Sie den Blickwinkel (horizontal und vertikal) des Babyphones.

#### Gemeinsamer Zugriff

Geben Sie über die App **Smart Life** den Zugriff auf Ihr Babyphone frei und lassen Sie vertrauenswürdige Personen das Live-Bild des Babyphones betrachten und Funktionen steuern.

#### Gegensprechfunktion

Hören oder sprechen Sie über die App **Smart Life** direkt in den überwachten Raum. Kinder ab 3 Jahren können über die Taste an dem Babyphone eine Gesprächsanfrage auf Ihr Smartphone/Tablet senden.

#### Nachtlicht

Verwenden Sie ein sanftes Nachtlicht und steuern Sie die Helligkeit variable, auch per Zeitschaltuhr.

#### Schlaflieder

Spiele 19 verschiedene Schlaflieder ab.

#### Lichtspiel

Lassen Sie von dem Babyphone ein beruhigendes Lichtspiel mit Mond und Sternen an die Decke/Wand werfen.

#### Nachtsicht

Der Nachtmodus hilft bei schlechten Lichtverhältnissen durch das automatische Einschalten des Infrarotlichts.

#### Raumtemperatur

Messen Sie die Raumtemperatur in Echtzeit und stellen Sie Warnungen beim Über-/Unterschreiten von Temperaturen ein.

#### Babyschreialarm

Lassen Sie sich über die App **Smart Life** auf Ihrem Smartphone/Tablet informieren, wenn Ihr Baby schreit.

#### Essenszeiten

Erstellen Sie einen Zeitplan, um sich an die Fütterung Ihres Babys erinnern zu lassen.

### Übersicht

Die Abbildungen zeigen Ihnen Ihr Babyphone im Detail.

|                            |                              |
|----------------------------|------------------------------|
| 1 Temperatur-Sensor        | 8 Kamera                     |
| 2 Lichtspiel               | 9 MicroUSB-Anschluss         |
| 3 Leuchtanzeige Link       | 10 Montagesockel             |
| 4 Taste Lichtspiel/Reset   | 11 Gerätefuß                 |
| 5 Leuchtanzeige Temperatur | 12 Nachtlicht                |
| 6 Taste Schlaflieder       | 13 Taste Gegensprechfunktion |
| 7 Lautsprecher             | 14 Taste Nachtlicht          |

### Was bedeuten die Leuchtanzeigen

Ihr Babyphone verfügt über verschiedene Leuchtanzeigen:

#### Leuchtanzeige Link

| Zustand       | Beschreibung                                  |
|---------------|-----------------------------------------------|
| Aus           | Nicht verbunden                               |
| Blinkt rot    | Startvorgang, bitte warten                    |
| Leuchtet rot  | Verbindungsfehler, Babyphone erneut verbinden |
| Blinkt blau   | Bereit für Verbindung                         |
| Leuchtet blau | Erfolgreich verbunden                         |

#### Leuchtanzeige Temperatur

| Zustand  | Beschreibung               |
|----------|----------------------------|
| Aus      | Keine Auffälligkeit        |
| Leuchtet | Temperatur zu niedrig/hoch |

### Babyphone anschließen und aufstellen

Ihr Babyphone funktioniert nur mit angeschlossenem Netzteil.

1. Verbinden Sie das Netzteil mit dem **MicroUSB-Anschluss 9** Ihres Babyphone.
2. Schließen Sie den Netzteil an einer ordnungsgemäß installierten Steckdose an.



Ihr Babyphone schaltet sich automatisch ein und ist bereit für die Verbindung, wenn die **Leuchtanzeige Link 3** blau blinkt.

3. Stellen Sie Ihr Babyphone auf einer flachen und ebenen Oberfläche auf.
4. Richten Sie Ihr Babyphone mit der App **Smart Life** optimal aus. Wenn Sie Ihr Babyphone längere Zeit nicht benutzen, trennen Sie dieses vom Stromnetz. Das Babyphone kann auch an einer Power-Bank betrieben werden.

#### Babyphone auf Kamerastativ montieren (optional)

Bei Bedarf können Sie Ihr Babyphone mit dem **Gerätefuß 11** auf einem Kamerastativ (nicht im Lieferumfang enthalten) montieren.

1. Schrauben Sie das Kamerastativ an den **Gerätefuß 11** Ihres Babyphones an.
2. Richten Sie Ihr Babyphone mit der App **Smart Life** optimal aus.

#### Babyphone an der Wand montieren (optional)

Bei Bedarf können Sie Ihr Babyphone mit dem **Gerätefuß 11** an der Wand montieren.

1. Stellen Sie sicher, dass sich am Montageort keine Strom-, Wasser- oder Gasleitungen befinden.



**WARNUNG!** Lebensgefahr durch Stromschlag oder Gasexplosion! Achten Sie bei der Montage auf eventuell in der Wand verlegte Strom- oder Gasleitungen. Achten Sie darauf, dass Sie nicht versehentlich Strom- oder Gasleitungen beschädigen.

2. Messen Sie den Abstand der Bohrlöcher am **Gerätefuß 11** aus.
3. Markieren Sie die Bohrlöcher im ausgemessenen Abstand an dem Montageort an der Wand.
4. Bohren Sie zwei Bohrlöcher.
5. Setzen Sie zwei passenden Dübel aus dem mitgeliefertem Montagematerial ein.



Je nach Montageuntergrund empfehlen wir Ihnen die Verwendung von Spezial-Dübeln.

- Befestigen Sie Ihr Babyphone mit zwei Schrauben an der Wand.
- Richten Sie Ihr Babyphone mit der App **Smart Life** optimal aus.

### App Smart Life installieren

Zur weiteren Einrichtung des Babyphones und Verbindung mit Ihrem Heimnetzwerk (WLAN) folgen Sie den Anweisungen in der App **Smart Life**.

- Lade Sie die App **Smart Life** aus dem App Store bzw. von Google Play herunter oder scannen Sie diesen QR-Code.



Achten Sie darauf, dass sich Ihr Babyphone und Ihr Smartphone/Tablet im Bereich des gleichen Heimnetzwerks (WLAN) befinden.

- Folgen Sie den Anweisungen der App, um Ihr Babyphone zu verbinden.
  - Bei erfolgreicher Verbindung leuchtet die **Leuchtanzeige Link 3** durchgängig blau.
- Nutzen Sie die App, um Ihr Babyphone optimal auszurichten und Funktionen zu nutzen.



Bei Fragen und Problemen bezüglich der App **Smart Life** wenden Sie sich an [www.go-europe.com](http://www.go-europe.com).

### Babyphone über Tasten bedienen

Viele Funktionen können Sie auch direkt über die Tasten Ihres Babyphones bedienen:

#### Lichtspiel

- Drücken Sie die **Taste Lichtspiel 4**.
  - Das **Lichtspiel 2** projiziert ein Lichtspiel an die Decke oder Wand.
- Richten Sie Ihr Babyphone bei Bedarf korrekt aus, um das **Lichtspiel 2** richtig darzustellen.

#### Nachtlicht

- Drücken Sie die **Taste Nachtlicht 14**.
  - Das **Nachtlicht 12** Ihres Babyphones leuchtet.
- Nutzen Sie die App, um die Helligkeit des **Nachtlichts 12** einzustellen.
- Drücken Sie erneut die **Taste Nachtlicht 14**.
  - Das **Nachtlicht 12** Ihres Babyphones erlischt.

#### Schlaflieder

- Drücken Sie die **Taste Schlaflied 6**.
  - Ihr Babyphone spielt ein Schlaflied ab.
- Nutzen Sie die App, um ein anderes Schlaflied auszuwählen oder die Lautstärke einzustellen.
- Drücken Sie erneut die **Taste Schlaflied 6**.
  - Ihr Babyphone stoppt das Abspielen des Schlaflieds.

#### Gegensprechfunktion

Diese Funktion ist für Kinder ab 3 Jahren geeignet.

- Ihr Kind drückt die **Taste Gegensprechfunktion 18**.

- In der App **Smart Life** auf Ihrem Smartphone/Tablet wird eine Gesprächsaufforderung angezeigt.
- Nehmen Sie die Gesprächsaufforderung an.
    - Es wird eine Ton- und Bildverbindung (Videotelefonie) zwischen Ihres Babyphones und Ihrem Smartphone/Tablet aufgebaut. Das Kamerabild wird angezeigt und Sie können mit Ihrem Kind sprechen.

### Babyphone zurücksetzen

Sie können Ihr Babyphone zurücksetzen. Dadurch wird die Verbindung mit Ihrem WLAN und der App **Smart Life** getrennt.

- Drücken und halten Sie die **Taste Reset 4** für mindestens 10 sek.
  - Ihr Babyphone vibriert kurz und die **Leuchtanzeige Link 3** erlischt.



Nach dem Zurücksetzen, schaltet sich Ihr Babyphone automatisch wieder ein und ist bereit zur Verbindung, wenn die **Leuchtanzeige Link 3** blau blinkt.

### Reinigung und Wartung

- Ziehe Sie das Netzteil von Ihres Babyphones.
- Reinigen Sie die Oberfläche mit einem trockenen oder leicht angefeuchteten Tuch.

Dieses Gerät erfordert keine spezielle Wartung. Reparaturen am Gerät dürfen nur von einem Fachmann durchgeführt werden.

### Entsorgung



Das nebenstehende Symbol bedeutet, dass elektrische und elektronische Altgeräte aufgrund gesetzlicher Bestimmungen getrennt vom Hausmüll zu entsorgen sind.



Entsorgen Sie Ihr Gerät bei der Sammelstelle Ihres kommunalen Entsorgungsträgers.



Entsorgen sie Verpackungsmaterialien entsprechend den lokalen Vorschriften.

### Fragen und Service

Lieber Kunde,

wir freuen uns, dass Sie sich für dieses Gerät entschieden haben.

Bei Fragen und Problemen steht Ihnen unsere Service-Hotline unter der Telefonnummer **+49 (0)180 5 007514** (Kosten aus dem dt. Festnetz bei Drucklegung: 14ct/Min., mobil maximal 42ct/Min.) zur Verfügung.

Weitere Informationen finden Sie in unserem Retouren-Portal (RMA) im Bereich Support auf unserer Internetseite [www.go-europe.com](http://www.go-europe.com).

Eine Rücksendung erfolgt unter Beifügung des Kaufbelegs und idealerweise in der Originalverpackung an:

**WSG Wilhelmshavener Service Gesellschaft mbH**

**Krabbenweg 14**

**26388 Wilhelmshaven (Germany)**

### Konformitätsinformationen



Das CE-Zeichen auf Ihrem Gerät bestätigt die Konformität. Die Konformitätserklärung zu diesem Produkt finden Sie unter <http://productip.com/?f=104f7f> oder scannen Sie diesen QR-Code.



### Technische Daten

|                                       |                                                                                                                                                                                                             |
|---------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Gewicht</b>                        | ca. 350 g                                                                                                                                                                                                   |
| <b>Abmessungen (L × B × H)</b>        | 82 × 103 × 88 mm                                                                                                                                                                                            |
| <b>Schwenkwinkel</b>                  | 145° vertikal, 330° horizontal                                                                                                                                                                              |
| <b>zulässige Umgebungsbedingungen</b> | -10 °C bis +45 °C                                                                                                                                                                                           |
| <b>Sendefrequenz</b>                  | 2,4 GHz (WLAN)                                                                                                                                                                                              |
| <b>Sendeleistung (max.)</b>           | 16 dBm (WLAN)                                                                                                                                                                                               |
| <b>WLAN</b>                           | IEEE 802.11 b/g/n                                                                                                                                                                                           |
| <b>Verschlüsselung</b>                | WEP, WPA, WPA2                                                                                                                                                                                              |
| <b>Spannungsversorgung</b>            | Eingangsspannung: <br>■ 100 - 240 V <sub>DC</sub> , 50/60 Hz, 0,35 A<br>Ausgangsspannung:<br>■ 5 V <sub>DC</sub> , 1,5 A |
| <b>Kameraobjektiv</b>                 | 2,0 MP                                                                                                                                                                                                      |
| <b>Auflösung</b>                      | 1080p (Full HD), 30 fps                                                                                                                                                                                     |
| <b>Schnittstellen</b>                 | MicroUSB-Anschluss                                                                                                                                                                                          |
| <b>Mikrofon</b>                       | ja                                                                                                                                                                                                          |
| <b>Lautsprecher</b>                   | ja                                                                                                                                                                                                          |
| <b>Audio und Video</b>                | Intercom-Funktion                                                                                                                                                                                           |
| <b>App (iOS/Android)</b>              | Smart Life                                                                                                                                                                                                  |

### Symbole auf der Verpackung



1080p (Full HD) Videostreaming



Projiziert Lichtspiel (Mond und Sterne)



19 beruhigende Schlaflieder



Überwachung der Temperatur im Raum



Alarmierung bei Bewegung und Geräuschen



Dimmbares Nachtlicht



135° Weitwinkel-Optik und 330° Rundumblick




Zeiteinstellung für Essenszeiten



Gegensprechfunktion

### Hersteller

GO Europe GmbH  
Zum Kraftwerk 1, 45527 Hattingen  
Germany  
[www.go-europe.com](http://www.go-europe.com)

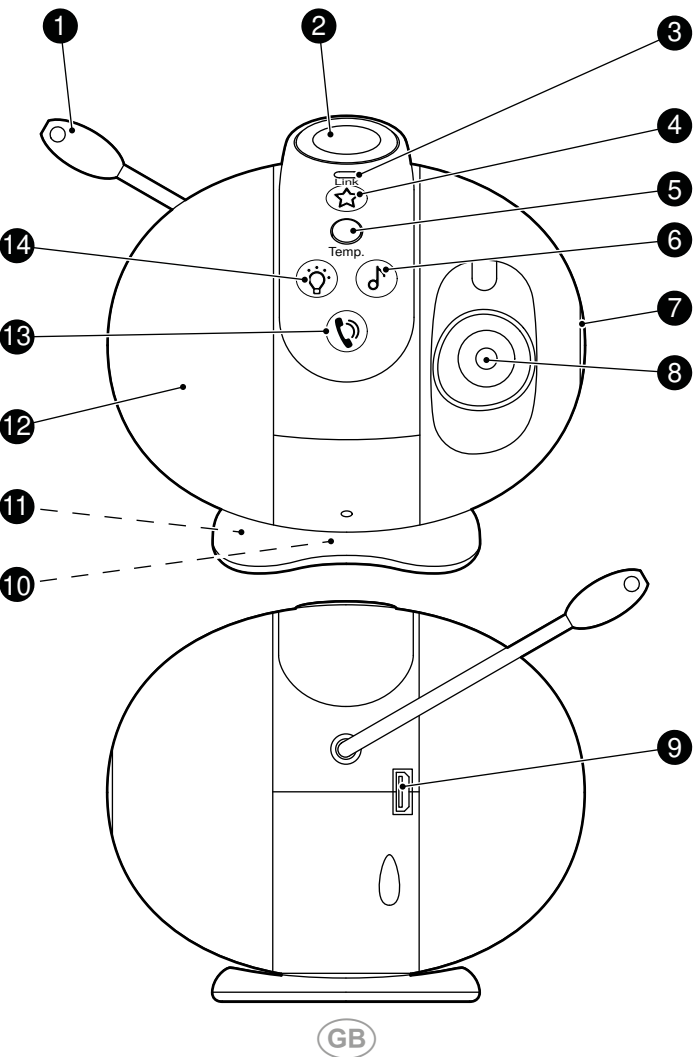

Read the operating manual thoroughly and observe the information contained when using the device. Keep the operating manual in a safe place for future reference.

Intended Use

The BC 2000 wifi baby monitor, subsequently refereed to simply as the baby monitor or device, has been designed for the video surveillance of indoor rooms by day and night.

During the installation and selection of the area of use of this baby monitor, you must ensure that the personal rights of third parties and the respective local regulations and laws are not violated.

A condition for complying with the intended use is that the equipment is installed correctly and the information in this manual is observed and maintained. Any use other than that described in the Section "Intended Use" is considered unintended use.

The baby monitor is not suitable for use in wet rooms or areas subject to explosion hazards.

The surveillance of third parties is not permitted without the respective, explicit authorisation and violation can result in legal consequences.

Unauthorised modification or reconstruction is not permitted. The baby monitor is exclusively intended for private use.

Safety Instructions

Avoid any personal injury by paying attention to the following information!

**WARNING!** Risk of electric shock! Never attempt to open or repair the device or components yourself. Never touch bare contacts with metallic objects. Never plug-in or disconnect the power plug with wet hands.

**WARNING!** Risk of suffocation! Children can swallow small parts, packaging and protective foils. Keep the product and packaging out of reach of children!

**WARNING!** Risk of fatal and personal injury! When monitoring babies or small children, pay attention that the device and cable are out of reach of the children.

**CAUTION!** Risk of injury! The bright light emitted by the lamp for the light effects could lead to damage to the eyes and impair the eyesight. In the case of children or persons with specific medical conditions (e.g. psychological disorders), a rapid change of light between the individual operating modes could, under certain circumstances, lead to impairment of the eyesight, twitching of eyes and muscles, disturbance of consciousness, loss of orientation, involuntary movements and cramps.

- ▶ In such cases, switch the light effects off straight away and seek medical attention immediately.
- ▶ Never point the light for the light effects into the eyes. Never point the light directly into the face of other persons.

**IMPORTANT!** Protect the device from damp, dust, liquids, chemicals, vapours, heat and direct sunlight. The device is not waterproof so keep it dry.

**IMPORTANT!** Only use original accessories. Only connect accessories approved by the manufacturer.

Package Contents

Check the package contents of your baby monitor before putting it into operation. If anything is missing or damaged, please contact our Service Department.

- BC 2000 wifi baby monitor
- Power adapter
- Assembly material
- Operating manual

System Requirements

You require a web-capable smartphone which implements the Android (from 4.4) or iOS (from 7) operating system and the current version of the **Smart Life** app.

In order to start up the baby monitor for the first time, it must be connected to the **Smart Life** app and the wifi connection of the router.

The baby monitor and smartphone/tablet PC must be registered on the same wifi network.

Pay attention to the following points when selecting an installation location.

- The baby monitor must be located within range of your wireless home network (wifi).
- It is essential to observe local regulations and laws.

Features

Its capability of compiling images and sounds means that the baby monitor can be deployed for surveillance and communication in a wide variety of areas.

The availability of a night light together with lullabies and light effects provides a further range of options.

All the functions can also be controlled remotely from your smartphone/tablet PC via the **Smart Life** app.

- **Remote Access**  
You can connect the **Smart Life** app to the baby monitor. The remote system allows you to view live or recorded images and control other functions. You can also adjust the viewing angle (horizontal and vertical) of the baby monitor.
- **Joint Access**  
You can use the **Smart Life** app to enable access to the baby monitor to be shared and allow trusted people to view live pictures and control functions.
- **Intercom Function**  
You can listen-in or speak directly into the room being monitored using the **Smart Life** app. Children from the age of 3 can use the button on the baby monitor to send a voice message to your smartphone/tablet PC.
- **Night Light**  
A soft night light is available and you can adjust the brightness, with a timer too.
- **Lullabies**  
There are 19 different lullabies ready to be played.
- **Light Effects**  
The baby monitor is provided with comforting light effects which shine the moon and stars onto the ceiling/walls.
- **Night Vision**  
Night time mode provides help in the case of poor light conditions by automatically switching on the infrared lamp.
- **Room Temperature**  
You can take real-time room temperature measurements and set a warning signal to alert you in case temperatures exceed or drop below the set temperatures.
- **Baby Crying Alert**  
The **Smart Life** app on your smartphone/tablet PC can be set-up to issue an alert when the baby cries.
- **Feeding Times**  
You can draw up a schedule to remind you of the feeding times for the baby.

General View

The following illustrations depicts your baby monitor in detail.

|                               |                                  |
|-------------------------------|----------------------------------|
| 1 Temperature sensor          | 8 Camera                         |
| 2 Light effects               | 9 MicroUSB port                  |
| 3 Link control lamp           | 10 Base                          |
| 4 Light effect / Reset button | 11 Mounting bracket (for tripod) |
| 5 Temperature control lamp    | 12 Night light                   |
| 6 Lullaby button              | 13 Intercom button               |
| 7 Loudspeaker                 | 14 Night light button            |

Significance of the Control Lamps

The baby monitor is equipped with various control lamps:

Link control lamp

| Status         | Description                                      |
|----------------|--------------------------------------------------|
| Off            | Not connected                                    |
| Flashing red   | Starting process, please wait                    |
| Lights up red  | Connection error, connect the baby monitor again |
| Flashing blue  | Ready for connection                             |
| Lights up blue | Successfully connected                           |

Temperature control lamp

| Status    | Description              |
|-----------|--------------------------|
| Off       | No irregularities        |
| Lights up | Temperature too low/high |

Positioning and Connecting the Baby Monitor

The baby monitor only functions when the power adapter is connected.

1. Connect the power adapter to the **MicroUSB port 9** on the baby monitor.
2. Connect the power adapter to a properly installed power socket.

The baby monitor switches on automatically and is ready to establish a connection to the wifi network when the **Link control lamp 3** flashes blue.

3. Set the baby monitor down on a flat, level surface.
4. Align the baby monitor optimally using the **Smart Life** app.

If the baby monitor will not be used for a longer period of time, disconnect it from the power supply. The baby monitor can also be operated via a power bank.

**Assembling the Baby Monitor on a Camera Tripod (Option)**  
If so required, the baby monitor can be assembled on a camera tripod (not enclosed in the package) by using the **mounting bracket 11**.

1. Screw the camera tripod in the **mounting bracket 11** on the baby monitor.
2. Align the baby monitor optimally using the **Smart Life** app.

**Assembling the Baby Monitor on a Wall (Option)**  
If so required, the baby monitor can be assembled on a wall using the **mounting bracket 11**.

1. Ensure that there are no electric cables, gas or water pipes near the installation location.
2. Measure the distance between the drill holes in the **mounting bracket 11**.
3. Mark the drill holes the measured distance apart at the assembly location on the wall.
4. Drill the two holes.

1. Insert two appropriate dowels taken from the assembly material supplied.



We recommend the use of special dowels according to the material on which the camera is being assembled.

2. Fix the baby monitor to the wall with two screws.
3. Align the baby monitor optimally using the **Smart Life** app.

### Installing the Smart Life App

To set-up the baby monitor and establish a connection to your home network (wifi), follow the instructions provided by the **Smart Life** app.

1. Download the **Smart Life** app from the App Store or Google Play or scan the QR code.



Ensure that the baby monitor and your smartphone/tablet PC are in range of the same home network (wifi).

2. Follow the instructions in the app to connect the baby monitor.
  - When a connection is established successfully, the **Link control lamp** ③ lights up blue continuously.
3. Use the app to align the baby monitor and use the functions provided.



In the case of queries and problems related to the **Smart Life** app, please visit [www.go-europe.com](http://www.go-europe.com).

### Operating the Baby Monitor Using the Buttons

Many functions can also be used directly using the buttons on the baby monitor:

#### Light effects

1. Press the **Light effects** ④ button.
  - The **light effect** ② is projected onto the ceiling or wall.
2. Align the baby monitor as necessary to ensure the **light effect** ② is displayed properly.

#### Night light

1. Press the **Night light** ⑭ button.
  - The **night light** ⑫ on the baby monitor lights up.
2. Use the app to adjust the brightness of the **night light** ⑫ as required.
3. Press the **Night light** ⑭ button again.
  - The **night light** ⑫ on the baby monitor goes out.

#### Lullabies

1. Press the **Lullaby** ⑥ button.
  - The baby monitor plays a lullaby.
2. Use the app to select another lullaby to be played or to adjust the volume.
3. Press the **Lullaby** ⑥ button again.
  - The baby monitor stops playing the lullaby.

#### Intercom function

This function is suitable for use by children from 3 years of age.

1. The child presses the **Intercom** ⑬ button.
  - A talk request is indicated on your smartphone/tablet PC by the **Smart Life** app.

2. Take the incoming talk request.

- An audio and video link (videotelephony) is established between the baby monitor and your smartphone/tablet PC. The camera picture is displayed and you can talk to the child.

### Resetting the Baby Monitor

You can reset the baby monitor. This disconnects the connection with the wifi network and the **Smart Life** app.

1. Press and hold the **Reset** ④ button for at least 10 seconds.
  - The baby monitor vibrates briefly and the **Link control lamp** ③ goes out.



After the reset function is completed, the baby monitor switches back on automatically and is ready to establish a connection when the **Link control lamp** ③ flashes blue.

### Cleaning and Maintenance

1. Disconnect the power adapter from the baby monitor.
2. Clean the surface with a dry or slightly moist cloth.

This device does not require any special maintenance. Repairs to the device may only be completed by a suitably qualified technician.

### Disposal



The adjacent symbol indicates that old electrical and electronic apparatus no longer required must be disposed of separate from domestic waste in accordance with legal directives.

Dispose of the device at collection points provided by your local waste authorities (e.g. recycling centre).



Packaging materials must be disposed of according to local regulations.

### Warranty

Dear customer,

we are delighted that you have chosen this equipment.

In the case of a defect, please return the device together with the receipt and original packing material to the point of sale.

### Information on Conformity



The CE mark on the device confirms its conformity. The Declaration of Conformity for this product is available at <http://productip.com/?f=104f7f> or scan the QR code.



### Technical Data

|                                       |                                |
|---------------------------------------|--------------------------------|
| <b>Weight</b>                         | Approx. 350 g                  |
| <b>Dimensions (L × W × H)</b>         | 82 × 103 × 88 mm               |
| <b>Pivoting angle</b>                 | 145° vertical, 330° horizontal |
| <b>Permissible ambient conditions</b> | -10 °C to +45 °C               |
| <b>Transmission frequency</b>         | 2.4 GHz (wifi)                 |
| <b>Transmission power (max.):</b>     | 16 dBm (wifi)                  |
| <b>Wifi</b>                           | IEEE 802.11 b/g/n              |
| <b>Encryption</b>                     | WEP, WPA, WPA2                 |

|                          |                                                                                                                                                                                                       |
|--------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Power supply</b>      | Input voltage: <ul style="list-style-type: none"><li>■ 100 - 240 V<sub>DC</sub>, 50/60 Hz, 0.35 A</li></ul> Output voltage: <ul style="list-style-type: none"><li>■ 5 V<sub>DC</sub>, 1.5 A</li></ul> |
| <b>Camera lens</b>       | 2.0 MP                                                                                                                                                                                                |
| <b>Resolution</b>        | 1080p (Full HD), 30 fps                                                                                                                                                                               |
| <b>Ports</b>             | MicroUSB port                                                                                                                                                                                         |
| <b>Microphone</b>        | Yes                                                                                                                                                                                                   |
| <b>Loudspeaker</b>       | Yes                                                                                                                                                                                                   |
| <b>Audio and video</b>   | Intercom function                                                                                                                                                                                     |
| <b>App (iOS/Android)</b> | Smart Life                                                                                                                                                                                            |

### Symbols on the Packaging



1080p (Full HD) video streaming



Projected light effects (moon and stars)



19 comforting lullabies



Room temperature monitoring



Warning alert in the case of movements and noises



Dimmable night light



135° wide-angle lens and 330° degree view



Timer for feeding times



Intercom function

### Manufacturer

GO Europe GmbH  
Zum Kraftwerk 1, 45527 Hattingen  
Germany  
[www.go-europe.com](http://www.go-europe.com)