



XP400R6 / XP500R6 / XP600R6 / XP700R6

The new Xilence Performance C series is focusing on the essentials. Designed for office and home computers, the new Performance C series delivers stable voltages with high efficiency (ErP2014). This guarantees a considerably low fan noise. Four built-in safty circuits ensure safe operation at all times.


Productfeatures

- extremely silent cooling: large 120mm fan
- excellent air flow design for a better heat dissipation -
- following safty design: Over Voltage Protection (OVP), Under Voltage Protection (UVP), Short Circuit Protection (SCP), Over Load Protection (OLP)
- low stand-by consumption
- complies with ErP2014 norm


Technical Data

AC INPUT		DC OUTPUT	
XP400R6	200V - 240V	+3.3V	10.0A
		+5V	10.0A
		+12V	15.0A
		-12V	0.3A
Efficiencies		+5VSB	3.0A
		10 %	78,21 %
		20 %	82,64 %
		50 %	85,43 %
		100 %	82,55 %
		300 W	continuous
		400 W	Peak Power

Cablemanagement

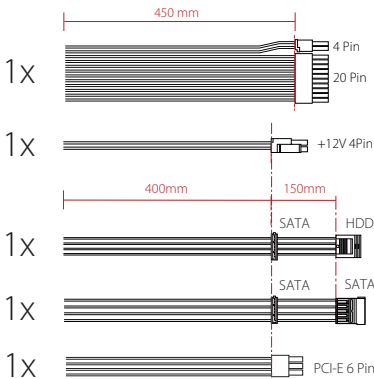

AC INPUT		DC OUTPUT	
XP500R6	200V - 240V	+3.3V	15.0A
		+5V	12.0A
		+12V1	15.0A
		+12V2	15.0A
Efficiencies		-12V	0.3A
		+5VSB	3.0A
		10 %	81,70 %
		20 %	85,38 %
		50 %	85,82 %
		100 %	82,67 %
		350 W	continuous
		500 W	Peak Power

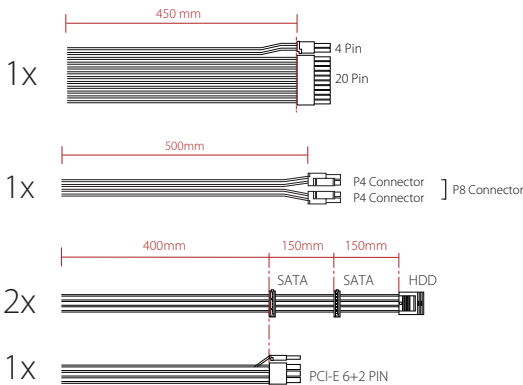

Technical Data

Cablemanagement

AC INPUT

DC OUTPUT

XP600R6

200V - 240V

+3.3V	15.0A
+5V	15.0A
+12V	18.0A
+12V2	20.0A
-12V	0.3A
+5VSB	3.0A
10 %	82,09 %
20 %	85,81 %
50 %	86,11 %
100 %	82,49 %
450 W	continous
600 W	Peak Power

Efficiencies

1x

450 mm

4 Pin

20 Pin

1x

500mm

P4 Connector

P4 Connector

P8 Connector

2x

400mm

150mm

150mm

150mm

SATA

SATA

SATA

HDD

1x

PCI-E 6+2 PIN

AC INPUT		DC OUTPUT	
XP700R6	200V - 240V	+3.3V	18.0A
		+5V	15.0A
		+12V	30.0A
		+12V2	30.0A
		-12V	0.3A
Efficiencies		+5VSB	3.0A
		10 %	83,87 %
		20 %	86,96 %
		50 %	86,90 %
		100 %	83,24 %
		550 W	continous
		700 W	Peak Power

The diagram illustrates the cable management for the XP700R6 power supply, showing the following configurations:

- 1x 450 mm Cable:** A standard power cable with a 4 Pin connector and a 20 Pin connector.
- 1x 500 mm Cable:** A cable with two P4 Connectors and one P8 Connector.
- 2x 400 mm SATA Cables:** Two SATA cables, each 400 mm long.
- 1x 150 mm HDD Cable:** A 150 mm long cable for connecting a hard drive.
- 1x PCIe 2/6 + 2Pin Cable:** A cable for connecting PCIe devices, featuring a 2/6 Pin connector and a 2Pin connector.

Logistical Data

Manufacturer number	Item number	EAN Barcode
XP400R6	XN041	4044953500213
XP500R6	XN042	4044953500220
XP600R6	XN044	4044953500237
XP700R6	XN046	4044953500541

All trademarks and registered marks are the property of their respective companies. Errors excepted. Subject to change without prior notice. Images may differ from original product.