

Data sheet

Connection cable M12 X-coded, 1.0 m
M12 plug angled - free line end
8-pole, position of coding 315°

Page 1/5

P/N

142M2X90010


EAN 4250184174899

2018-09-01


Illustrations



Dimensional drawing

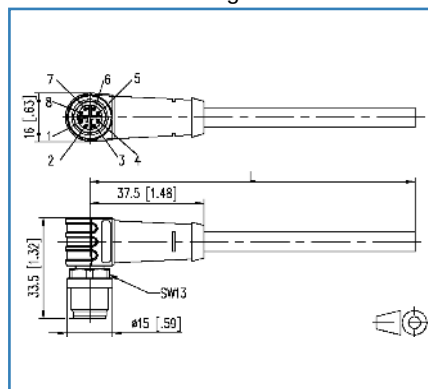

Wiring

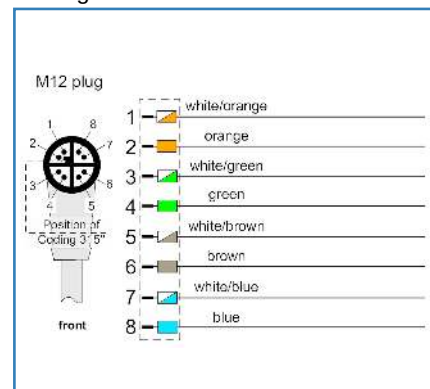

See enlarged drawings at the end of document

Product specification

- shielded M12 Ethernet connection cable
- Cat.6A, X-coded, 8-pole
- side 1: M12 connector, angled, position of coding 315°
- side 2: free line end
- M12 connector over molded
- stranded wires 4x2xAWG26/7
- overall shield tinned copper braid
- green cable, PUR
- standard variants: 1.0 m, 2.0 m, 5.0 m, 10.0 m
- other cable lengths on request



Data sheet

Page 2/5

Connection cable M12 X-coded, 1.0 m M12 plug angled - free line end 8-pole, position of coding 315°

P/N

142M2X90010

EAN 4250184174899

2018-09-01

Technical Data

General Data

Fields of application	Industrial Ethernet
Design	Ethernet-Connection cable
Shielding	shielded
Transmission technology	Copper
Cable Type	S/FTP
Number of twisting elements	4
Twisting element	Pair
Color coding fiber/ wire(s)	white/orange, orange, white/green, green, white/brown, brown, white/blue, blue
Color	green
Dimensions	
Dimension - Interface 1 (L x W x H)	33.50 x 15.00 x 15.00 mm
Dimension - Interface 1 (L x W x H)	1.319 x 0.591 x 0.591 in.
Cable length (m)	1.00 m
Cable length (ft)	3.28 ft

Transmission characteristics

Category (ISO)	6 _A
Transmission rate up to 10 GBit	IEEE 802.3an

Connections/interfaces

Connector technology interface 1	Free line end
Connector technology interface 2	M12-plug
Coding interface 2	X-coded
Number of positions/contacts interface 1	8P/8C
Number of positions/contacts interface 2	8
Termination data, stranded wire (min. - max.)	
Conductor cross section, stranded wire	AWG 26/7
Conductor cross section, stranded wire	0.141 mm ²
Conductor diameter, stranded wire (bare copper)	0.483 mm
Conductor diameter, stranded wire (bare copper)	0.019 in.



Data sheet

Page 3/5

Connection cable M12 X-coded, 1.0 m M12 plug angled - free line end 8-pole, position of coding 315°

P/N

142M2X90010

EAN 4250184174899

2018-09-01

Technical Data

Connections/interfaces

Cable sheath diameter (min. - max.)

Cable sheath diameter 6.40 mm

Cable sheath diameter 0.236 in.

Electrical characteristics

Through resistance max. 5 mOhm

Insulation resistance min. 100 MOhm

Mechanical characteristics

Bending radius without load min. 64 mm

Materials and material properties

Material - Cable jacket PUR

Material - Body interface 2 Plastics

Material - Contact interface 2 CuZn (brass)

Material - Contact finish interface 2 Au (gold)

Material - Contact carriers interface 2 Plastics

Material - Union nut interface 2 CuZn (brass)

Material - Union nut finish interface 2 Ni (nickel)

Material - Main shield Cu (copper) braid

Material - Main shield finish Sn (tin)

Flame retardancy yes

Environmental conditions

Temperature (min. - max.)

Temperature - Storage °C -30 - 90 °C

Temperature - Storage °F -22 - 194 °F

Temperature - Operating °C -30 - 90 °C

Temperature - Operating °F -22 - 194 °F

Particulate ingress interface 2 IP6X when plugged in

Liquid ingress/immersion interface 2 IPX7 when plugged in

Pollution degree interface 2 3



Data sheet

Page 4/5

Connection cable M12 X-coded, 1.0 m M12 plug angled - free line end 8-pole, position of coding 315°

P/N

142M2X90010

EAN 4250184174899

2018-09-01

Technical Data

Approvals

RoHS compliant

The product meets the following standards

Generic cabling systems

General requirements ISO/IEC 11801-1 | DIN EN 50173-1

Multi-element metallic cables used in analogue and digital communication and control DIN EN 50288-4-1

Test for vertical flame propagation for a single insulated wire or cable DIN EN 60332-1-2

Measurement of smoke density of cables burning DIN EN 61034

Classifications

ETIM 5.0 EC002599

ETIM 6.0 EC002599

Packing details

Type of packaging 1 pc(s) / plastic bag



P | Cabling

Data sheet

Page 5/5

Connection cable M12 X-coded, 1.0 m
M12 plug angled - free line end
8-pole, position of coding 315°

P/N


142M2X90010

EAN 4250184174899

2018-09-01

Illustrations

Dimensional drawing

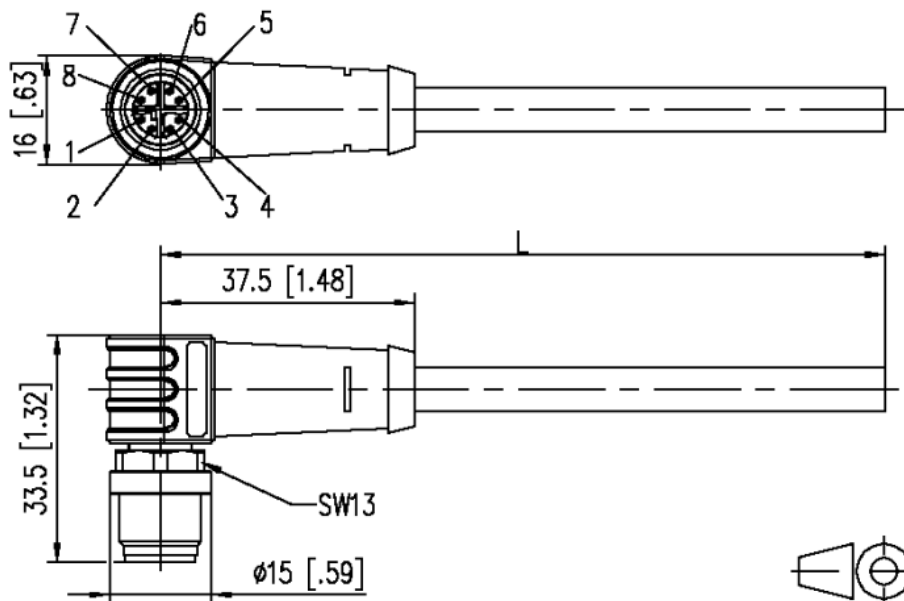

Wiring

M12 plug

