

4x MiMo 4G/5G Antenna

DWMM4[G]-6-60

PANORAMA ANTENNAS



DWMM4[G]-6-60

- 4x4 MiMo 4G/5G antenna solution
- Wall, mast or desk mount
- Optional GPS/GNSS - 26dB LNA
- Integrated coaxial cables

The DWMM4[G]-6-60 antenna provides 4x4 MiMo solution for global 4G/5G networks from 617-6000MHz. Incorporating four separately fed ultra wideband elements in a single housing the DWMM4[G] is suitable for a huge range of fixed site and failover applications.

The supplied mounting bracket enables simple wall mounting using the supplied screws and wall plugs and mast mounting using the supplied clamps. The antenna can also be mounted with screws directly to non-conductive panels or internal walls or stood on a desk using supplied mounting feet.


The omni-directional radiation pattern allows easy placement of the antenna without requiring directional alignment.

The DWMM4G type is supplied with an integrated GPS/GNSS module with 26dB LNA gain and advanced filtering to combat noise.

The antenna is fitted with integrated flame retardant CS32 cable (FR CS29 for GPS/GNSS) which minimises exposed connector joints and simplifies cable management for easy installation.

Technical Drawing

DWMM4G-6-60-5SP Shown

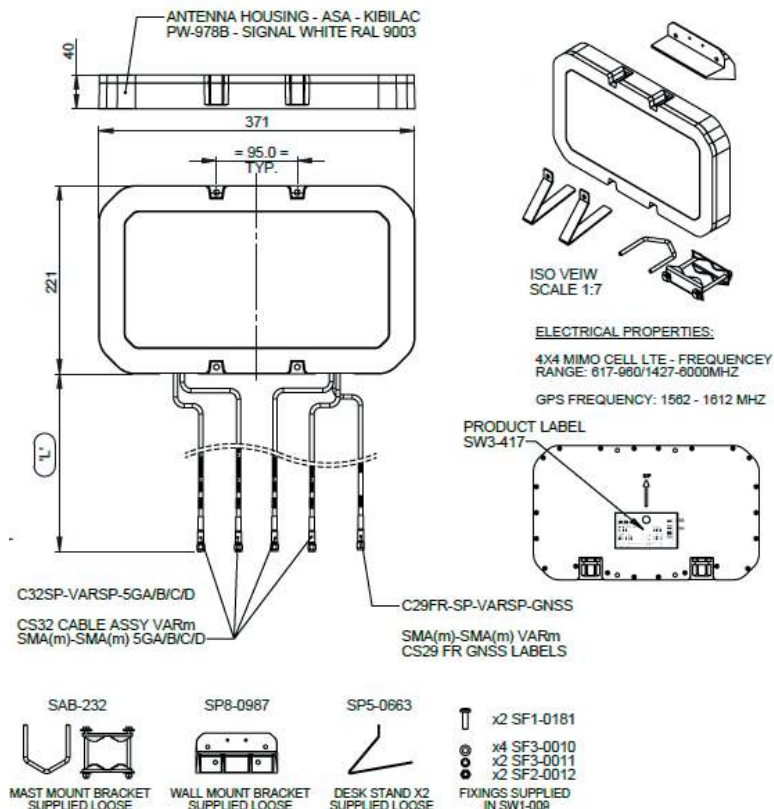

4x MiMo 4G/5G Antenna

DWMM4[G]-6-60

PANORAMA ANTENNAS

Product Data

Part No.		DWMM4-6-60-5SP	DWMM4-6-60-5FKJ	DWMM4-6-60-5NP	DWMM4-6-60-05NJ
Electrical Data					
Frequency Range (MHz)	Elements 1-4	617-960 / 1427-6000			
Operational Band	Elements 1-4	2G/3G/4G/5G			
Peak Realised Gain: Isotropic* Elements 1-4	617-960MHz	3.5dBi			
	1427-2700MHz	5dBi			
	3400-4200MHz	6dBi			
	4900-6000MHz	7dBi			
Typical VSWR**		<2.5:1			
Nominal Radiated Efficiency*		> 70%			
Correlation Co-efficient		< 0.1			
Polarisation		+/-45 degrees			
Pattern		Hybrid			
Impedance		50Ω			
Max Input Power (W)		10			
Mechanical Data					
Dimensions (mm)	Length	371 (14.6")			
	Height Excl Brkt	221 (8.7")			
	Depth	40 (1.57")			
Operating Temp (°C)		-40° / +85°C (-40° / 185°F)			
Radome Material		ASA			
Material Approvals		Radome ASA Material - UL 746C F1, UL 94-HB			
Colour		White			
Ingress Protection		IP66			
Mounting Data					
Fixing		Wall, Mast, Rail or Panel Mount			
Max Mast / Rail Diameter (mm)		50 (1.96")			
Cable Data					
4G/5G Cables	Type	CS32 (EN45545-2 & UN ECE R118 Compliant)			
	Diameter (mm)	5 (0.19")			
	Length (m)	5 (16' 4")	5 (16' 4")	5 (16' 4")	0.5 (1' 6")
	Termination	SMA (m)	FAKRA D Jack	N (m)	N(f)

* Peak gain and efficiency simulated in CST microwave studio for each element in free space excluding cable loss ** Typical VSWR measured with 0.5m (1.5') of cable in free space.

4x MiMo 4G/5G Antenna

DWMM4[G]-6-60

PANORAMA ANTENNAS

Product Data

Part No.

DWMM4G-6-60-5SP

DWMM4G-6-60-5FKJ

DWMM4G-6-60-5NP

DWMM4G-6-60-05NJ

Electrical Data

Frequency Range (MHz) Elements 1-4 617-960 / 1427-6000

Element 5 1559-1612

Operational Band Elements 1-4 2G/3G/4G/5G

Element 5 GPS/GNSS

617-960MHz 3.5dBi

Peak Realised Gain: Isotropic* 1427-2700MHz 5dBi

Elements 1-4 3400-4200MHz 6dBi

4900-6000MHz 7dBi

Typical VSWR** <2.5:1

Nominal Radiated Efficiency* > 70%

Correlation Co-efficient < 0.1

Polarisation +/-45 degrees

Pattern Hybrid

Impedance 50Ω

Max Input Power (W) 10

GPS/GNSS Data

Frequency Range (MHz) 1559-1612

Typical VSWR <2.5:1

LNA Gain 26dB (+/-3)

Polarisation RHCP

Operating Voltage 3-5 VDC <20ma

Mechanical Data

Length 371 (14.6")

Dimensions (mm) Height Excl Brkt 221 (8.7")

Depth 40 (1.57")

Operating Temp (°C) -40° / +85°C (-40° / 185°F)

Radome Material ASA

Material Approvals Radome ASA Material - UL 746C F1, UL 94-HB

Colour White

Ingress Protection IP66

Mounting Data

Fixing Wall, Mast, Rail or Panel Mount

Max Mast Diameter (mm) 50 (1.96")

Cable Data

Type CS32 (EN45545-2 Compliant)

Diameter (mm) 5 (0.19")

Length (m) 5 (16' 4") 5 (16' 4") 5 (16' 4") 0.5 (1' 6")

Termination SMA (m) FAKRA D Jack N (m) N(f)

Type CS29 FR (EN45545-2 & UN ECE R118 Compliant)

Diameter (mm) 5 (0.19")

Length (m) 5 (16' 4") 5 (16' 4") 5 (16' 4") 0.5 (1' 6")

Termination SMA (m) FAKRA C Jack N (m) N(f)

* Peak gain and efficiency simulated in CST microwave studio for each element in free space excluding cable loss ** Typical VSWR measured with 0.5m (1.5') of cable in free space.

Panorama Antennas Ltd
Frogmore, London, SW18 1HF, United Kingdom
T: +44 (0)20 8877 4444 | F: +44 (0)20 8877 4477
E: sales@panorama-antennas.com
W: www.panorama-antennas.com

DWMM4[G]-6-60 10/12/2021 V2

Waiver: The data given above is indicative of the performance of the product/s under particular conditions and does not imply a guarantee of performance. These specifications are subject to change without notice. Copyright © Panorama Antennas Ltd. All rights reserved.


4x MiMo 4G/5G Antenna

DWMM4[G]-6-60

PANORAMA ANTENNAS

Electrical Data

Typical VSWR*

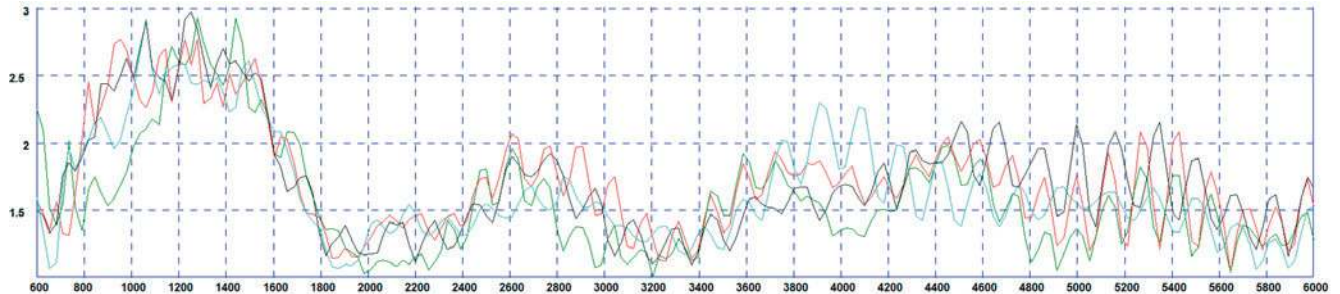


*Typical VSWR for elements 1-4 measured in free space with 0.5m (1.5') of CS32 cable.

Typical Isolation*




*Red Plot = Worst case isolation - element B to element C 0.5m (1.5') of cable Green Plot = Best case isolation - element A to element B - 0.5m (1.5') of cable

Typical Efficiency*

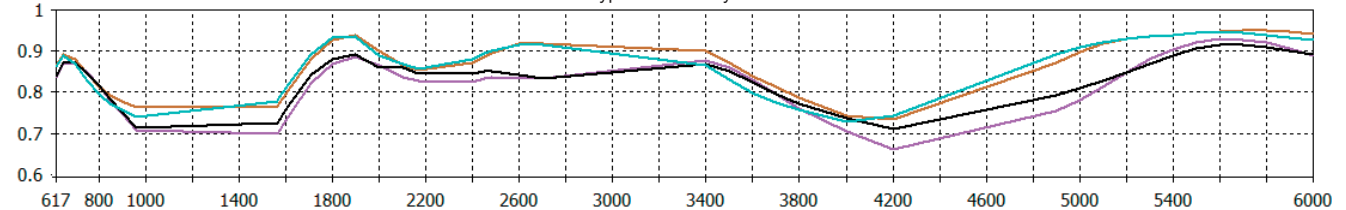

*Typical efficiency simulated in CST Microwave Studio in free space without cable.

Typical Swept Peak Gain*

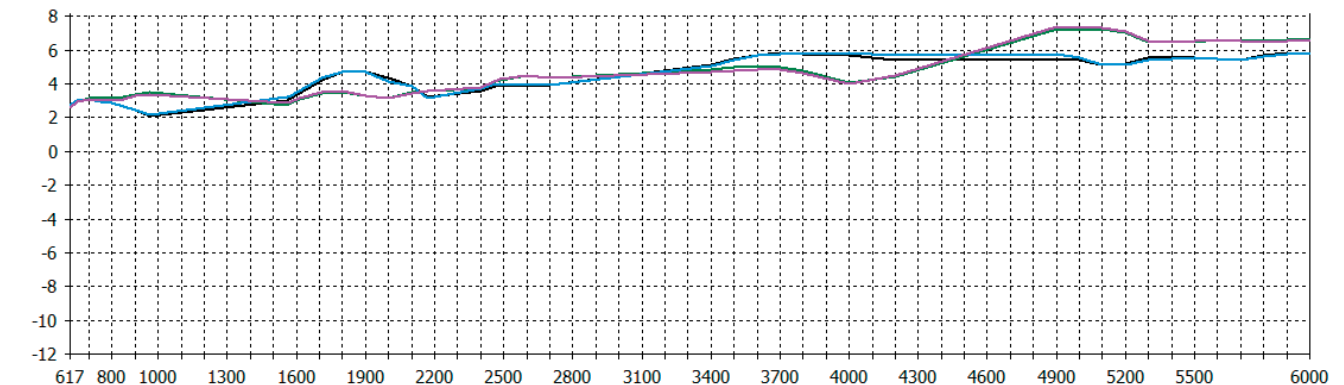

* Peak gain simulated in CST Microwave Studio in free space without cable.


4x MiMo 4G/5G Antenna

DWMM4[G]-6-60


PANORAMA ANTENNAS

3D Patterns - 4G/5G Side


3D Plot Element A Side (650 MHz)




3D Plot Element B Side (650 MHz)




3D Plot Element C Side (650 MHz)




3D Plot Element D Side (650 MHz)




3D Plot Element A Side (750 MHz)




3D Plot Element B Side (750 MHz)




3D Plot Element C Side (750 MHz)




3D Plot Element D Side (750 MHz)




3D Plot Element A Side (850 MHz)




3D Plot Element B Side (850 MHz)




3D Plot Element C Side (850 MHz)




3D Plot Element D Side (850 MHz)




3D Plot Element A Side (1800 MHz)




3D Plot Element B Side (1800 MHz)




3D Plot Element C Side (1800 MHz)




3D Plot Element D Side (1800 MHz)




3D Plot Element A Side (2000MHz)




3D Plot Element B Side (2000 MHz)




3D Plot Element C Side (2000 MHz)




3D Plot Element D Side (2000 MHz)




3D Plot Element A Side (2600MHz)




3D Plot Element B Side (2600 MHz)



3D Plot Element C Side (2600 MHz)



3D Plot Element D Side (2600 MHz)



* 3D patterns simulated for each element in CST microwave studio in free space excluding cable loss

Panorama Antennas Ltd
Frogmore, London, SW18 1HF, United Kingdom
T: +44 (0)20 8877 4444 | F: +44 (0)20 8877 4477
E: sales@panorama-antennas.com
W: www.panorama-antennas.com

DWMM4[G]-6-60 10/12/2021 V2

Page 5

Waiver: The data given above is indicative of the performance of the product/s under particular conditions and does not imply a guarantee of performance. These specifications are subject to change without notice. Copyright © Panorama Antennas Ltd. All rights reserved.


4x MiMo 4G/5G Antenna

DWMM4[G]-6-60


PANORAMA ANTENNAS

3D Patterns - 4G/5G Side


3D Plot Element A Side (3600MHz)




3D Plot Element B Side (3600 MHz)




3D Plot Element C Side (3600 MHz)




3D Plot Element D Side (3600 MHz)




3D Plot Element A Side (5400MHz)




3D Plot Element B Side (5400 MHz)



3D Plot Element C Side (5400 MHz)



3D Plot Element D Side (5400 MHz)



* 3D patterns simulated for each element in CST microwave studio in free space excluding cable loss


4x MiMo 4G/5G Antenna

DWMM4[G]-6-60


PANORAMA ANTENNAS

3D Patterns - 4G/5G Top


3D Plot Element A Top (650 MHz)




3D Plot Element B Top (650 MHz)

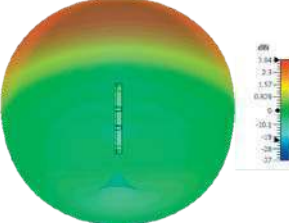


3D Plot Element C Top (650 MHz)

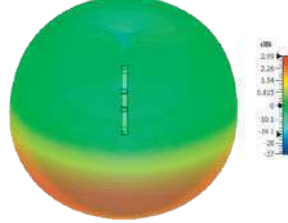


3D Plot Element D Top (650 MHz)




3D Plot Element A Top (750 MHz)




3D Plot Element B Top (750 MHz)




3D Plot Element C Top (750 MHz)




3D Plot Element D Top (750 MHz)




3D Plot Element A Top (850 MHz)




3D Plot Element B Top (850 MHz)




3D Plot Element C Top (850 MHz)




3D Plot Element D Top (850 MHz)




3D Plot Element A Top (1800 MHz)




3D Plot Element B Top (1800 MHz)




3D Plot Element C Top (1800 MHz)




3D Plot Element D Top (1800 MHz)




3D Plot Element A Side (2000MHz)




3D Plot Element B Side (2000 MHz)




3D Plot Element C Side (2000 MHz)




3D Plot Element D Side (2000 MHz)

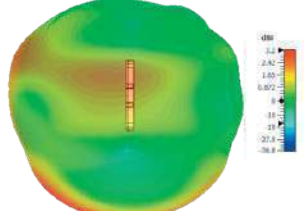


3D Plot Element A Top (2600MHz)




3D Plot Element B Top (2600 MHz)



3D Plot Element C Top (2600 MHz)



3D Plot Element D Top (2600 MHz)



* 3D patterns simulated for each element in CST microwave studio in free space excluding cable loss

Panorama Antennas Ltd
Frogmore, London, SW18 1HF, United Kingdom
T: +44 (0)20 8877 4444 | F: +44 (0)20 8877 4477
E: sales@panorama-antennas.com
W: www.panorama-antennas.com

DWMM4[G]-6-60 10/12/2021 V2

Waiver: The data given above is indicative of the performance of the product/s under particular conditions and does not imply a guarantee of performance. These specifications are subject to change without notice. Copyright © Panorama Antennas Ltd. All rights reserved.


4x MiMo 4G/5G Antenna

DWMM4[G]-6-60


PANORAMA ANTENNAS

3D Patterns - 4G/5G Top


3D Plot Element A Top (3600MHz)




3D Plot Element B Top (3600 MHz)




3D Plot Element C Top (3600 MHz)

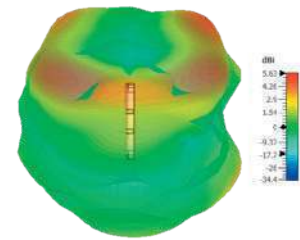


3D Plot Element D Top (3600 MHz)

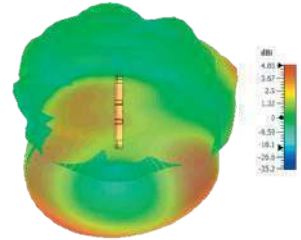


3D Plot Element A Top (5400MHz)




3D Plot Element B Top (5400 MHz)



3D Plot Element C Top (5400 MHz)



3D Plot Element D Top (5400 MHz)



* 3D patterns simulated for each element in CST microwave studio in free space excluding cable loss