


AXIS TP3302-E Corner Mount

Corner mount for dome and panoramic cameras

With a stylish design, this compact, all-in-one, outdoor-ready mount blends seamlessly into most indoor and outdoor environments. It offers flexible installation and can be mounted on either the left or right side to suit specific needs.

- > **Aesthetically appealing design**
- > **Mountable on either left or right side**
- > **Spacious compartment for connectivity devices**
- > **Robust, IK10-rated**
- > **Outdoor and indoor-ready**

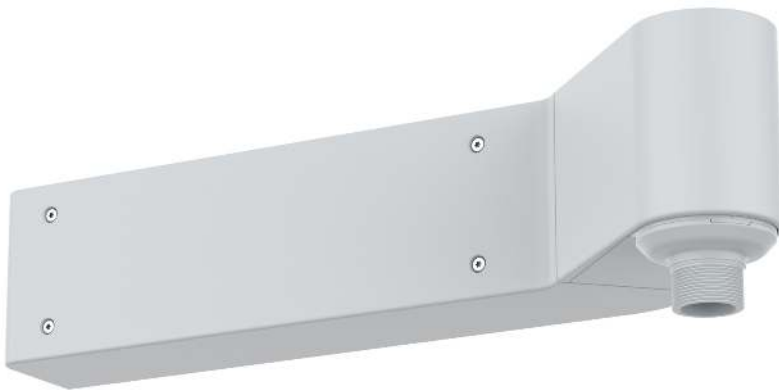

AXIS TP3302-E Corner Mount

Approvals

Environment

IEC 60068-2-1, IEC 60068-2-2, IEC 60068-2-6,
IEC 60068-2-14, IEC 60068-2-27, IEC 60068-2-78,
IEC/EN 60529 IP66, IEC/EN 62262 IK10

General

Supported products

Cameras compatible with specific pendant kits with
1.5" NPS thread mount, such as:

AXIS T94K01D Pendant Kit

AXIS T94M01D Pendant Kit

AXIS T94N01D Pendant Kit

AXIS T94N02D Pendant Kit

AXIS T94T02D Pendant Kit

AXIS TP3103-E Pendant Kit

AXIS TQ3103-E Pendant Kit

For a complete list of compatible cameras, go to axis.com/products/axis-tp3302-e-corner-mount#compatible-products

Casing

IP66- and IK10-rated

Plastic casing

Color: white NCS S 1002-B

For repainting instructions, go to the product's support page. For information about the impact on warranty, go to axis.com/warranty-implication-when-repainting. This product can be repainted.

Mounting

Back: Cable hole

Side: 3/4" (M25) conduit side entries

Connectors

Output: IP66, RJ45 Ethernet (male)

Input: RJ45 Ethernet (female), IDC

Operating conditions

Temperature: -40 °C to 65 °C (-40 °F to 149 °F)

Humidity: 10–100% RH (condensing)

Storage conditions

Temperature: -40 °C to 65 °C (-40 °F to 149 °F)

Humidity: 5–95% RH (non-condensing)

Dimensions

For the overall product dimensions, see the dimension drawing in this datasheet.

Effective Projected Area (EPA): 0.35 m² (1.15 ft²)

Weight

4823 g (10.6 lb)

Box content

Mount, installation guide, wall bracket, connector guard, cable ties

Languages

English, German, French, Spanish, Italian, Russian, Simplified Chinese, Japanese, Korean, Portuguese, Polish, Traditional Chinese, Dutch, Czech, Swedish, Finnish, Turkish, Thai, Vietnamese

Warranty

3-year warranty, see axis.com/warranty

Part numbers

Available at axis.com/products/axis-tp3302-e-corner-mount#part-numbers

Optional accessories

Mounting

AXIS T94 Pendant Kit, AXIS TQ31 Pendant Kit,

AXIS TP3103-E Pendant Kit

For more accessories, go to axis.com/products/axis-tp3302-e-corner-mount#compatible-products

Sustainability

Substance control

PVC free, BFR/CFR free in accordance with JEDEC/ECA Standard JS709

RoHS in accordance with EU RoHS Directive 2011/65/EU and 2015/863, and standard EN IEC 63000:2018

REACH in accordance with (EC) No 1907/2006. For SCIP UUID, see echa.europa.eu

Materials

Renewable carbon-based plastic content: 70% (biobased)



Screened for conflict minerals in accordance with OECD guidelines

To read more about sustainability at Axis, go to axis.com/about-axis/sustainability



Environmental responsibility

axis.com/environmental-responsibility


Axis Communications is a signatory of the UN Global Compact, read more at *unglobalcompact.org*





689 [27.13]



140 [5.51]




191,3 [7.53]




103 [4.06]

232 [9.13]

Bracket for AXIS TP3302-E Corner Mount.

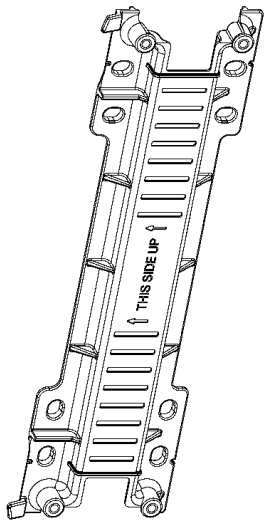

34 [1.34] 215.8 [8.5] 34 [1.339]

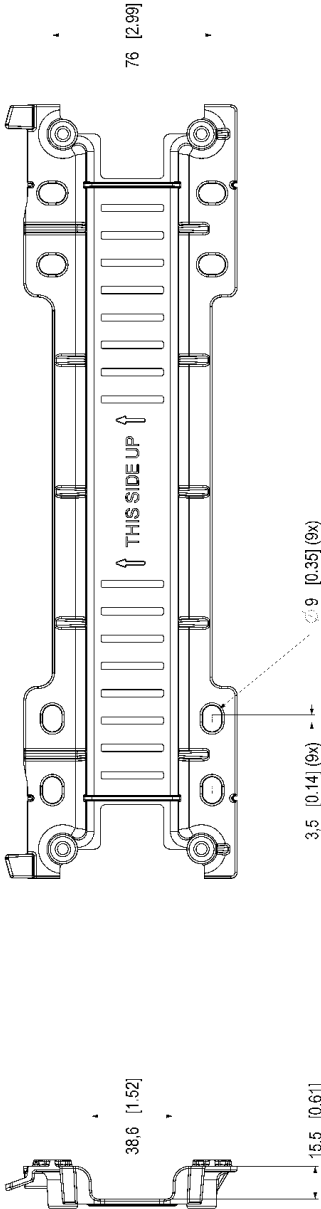

AXIS TP3302-E Corner Mount

Document part	1
AXIS TP3302-E	1
AXIS TP3302-E	1
AXIS TP3302-E	1
AXIS TP3302-E	1