


# ROLINE RM S/FTP (PiMF) Patch Cord Cat.6A, white, 20m

|                    |                          |
|--------------------|--------------------------|
| Product No.        | 21.45.3269               |
| Manufacturer       | ROLINE RECYCLED MATERIAL |
| Manufacturer No.   | 21.45.3269               |
| EAN (single piece) | 7630049631922            |

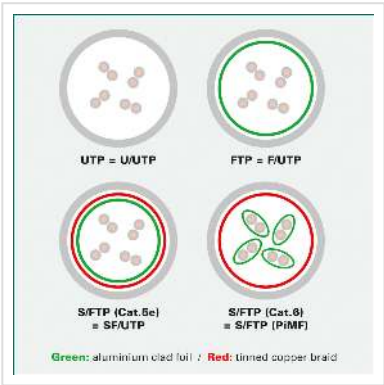

The patch cables in the **ROLINE RECYCLED MATERIAL** product line with shielded RJ-45 connectors are ideal for 10 Gigabit Ethernet networks. Gold-plated contacts and moulded bend protection ensure durability and reliable performance.

- Patch cable for networking connections between devices
- Prepared double shielded Twisted Pair cable with screened RJ-45 connectors on both ends
- Durable due to moulded kink protection
- Flexible cable, suitable for narrow bending
- High quality plugs with gold plated contacts
- Contact settings 1:1, in accordance with the EIA/TIA 568 standard
- Construction: 4-pair stranded copper wire
- Complete braid shielding. Pairs shielded with aluminium clad polyester foil

**ROLINE RECYCLED MATERIAL** products consist of more than 50% recycled materials. The packaging is even made from 100% recycled material.

| Technical specifications |                          |
|--------------------------|--------------------------|
| Manufacturer             | ROLINE RECYCLED MATERIAL |
| Product group            | Twisted Pair Cable       |

|                                    |                  |
|------------------------------------|------------------|
| Product type                       | S/FTP Patchcord  |
| Colour                             | white            |
| Length                             | 20 m             |
| Shield type                        | SFTP             |
| Transfer quality                   | Cat6A / Class EA |
| Quantity of wires                  | 8                |
| Conductor type                     | Wire             |
| Crossed                            | no               |
| Locking lever                      | yes              |
| Anti-kink sleeve                   | Moulded-on       |
| Side 1 Connector Type              | RJ-45            |
| Side 1 Connector Gender            | Male             |
| Side 2 Connector Type              | RJ-45            |
| Side 2 Connector Gender            | Male             |
| Connector Type RJ45                | Standard         |
| Operating temperature min.         | -20 °C           |
| Operating temperature max.         | 75 °C            |
| Storage temperature min.           | -20 °C           |
| Storage temperature max.           | 80 °C            |
| Weight                             | 578.2 g          |
| Height of packaging (single piece) | 60 mm            |
| Width of packaging (single piece)  | 200 mm           |
| Depth of packaging (single piece)  | 200 mm           |

|                               |         |
|-------------------------------|---------|
| Package weight (single piece) | 0.65 kg |
|-------------------------------|---------|