



TP-Link INSIGHT S355 Bullet IP security camera Outdoor 2880 x 1620 pixels Wall



Brand : TP-Link

Product code: INSIGHT S355(4MM)

Product name : INSIGHT S355

- 5MP Super-High Definition and 24h Full-Color
- People & Vehicle Analytics
- Human & Vehicle Classification
- Smart Detection
- Smart Video Enhancement Technology
- Active Defense and Two-Way Audio
- IP67 Waterproof
- H.265+ Compression Technology

VIGI 5MP Outdoor Full-Color Bullet Network Camera, 1/2.7", 1/3 to 1/10000 s, F1.6, 2880 x 1620, CBR, VBR, BLC/3D DNR/HLC/SmartIR, 120 dB, 12V DC $\pm$ 5%, Max. 9.7 W, 5.5 mm Coaxial Power Plug, PoE: 802.3af/at, class 0, Max. 10.7 W, IP67, 184 x 74 x 74 mm, 0.525 kg, White


TP-Link INSIGHT S355. Type: IP security camera, Placement supported: Outdoor, Connectivity technology: Wired. Mounting type: Wall, Product colour: White, Form factor: Bullet. Lens viewing angle, horizontal: 88°, Lens viewing angle, vertical: 46°, Lens viewing angle, diagonal: 105.4°. Sensor type: CMOS, Optical sensor size: 25.4 / 2.7 mm (1 / 2.7"). Detect distance: 80 m, Observe distance: 33 m, Recognize distance: 16 m

Performance		Audio	
Type *	IP security camera	Audio input channels	1.0 channels
Placement supported *	Outdoor	Audio output channels	1.0 channels
Connectivity technology *	Wired	Audio formats supported	G.711 A-law
Maximum operating distance	80 m	Sample rate	8 kHz
Wide Dynamic Range (WDR)	✓	Built-in microphone	✓
Day/night mode	✓	Number of microphones	1
Infrared (IR) cut-off filter	✓	Bit rate range	0 - 64 Kbit/s
Remote viewing	✓	Network	
Dynamic range	120 dB	Ethernet LAN *	✓
Design		Networking standards	IEEE 802.3af, IEEE 802.3at
Form factor *	Bullet	Supported network protocols	TCP/IP, UDP, ICMP, HTTP, HTTPS, DHCP, DNS, RTSP, NTP, UPnP UDP, SSL/TLS, FTP/SFTP, RTP, IPv4, IPv6, ARP
Mounting type *	Wall	Wi-Fi *	✗
Product colour *	White	Bluetooth *	✗
Housing material	Metal	Live view	✓
Protection features	Waterproof	Storage	
International Protection (IP) code	IP67	Compatible memory cards	MicroSD (TransFlash)
Weatherproof	✓	Maximum memory card size	512 GB
Camera		Ports & interfaces	
Minimum illumination	0 lx	DC-in jack	✓
Lens viewing angle, horizontal	88°	Security	
Lens viewing angle, vertical	46°	Built-in siren	✓
Lens viewing angle, diagonal	105.4°	Password protection	✓
Tilt angle range	0 - 90°	Video motion detection	✓
Camera shutter speed	1/3 to 1/10000	IP address filtering	✓
Image sensor		HTTPS encryption	✓
Optical sensor size	25.4 / 2.7 mm (1 / 2.7")	Alert notification type	Push notification
Progressive scan	✓		
Sensor type *	CMOS		

Lens system		Security	
Detect distance	80 m	Motion sensor	✓
Observe distance	33 m	Mirror	✓
Recognize distance	16 m	Human and vehicle targets classification	✓
Fixed focus	✓	Digest authentication	✓
Maximum aperture number	1.6	Management features	
Identify distance	8 m	Web browser	✓
Fixed focal length	4 mm	Cloud-managed *	✓
Night vision		Reset button	✓
Night vision *	✓	Power	
LED type	IR/White	Power source type *	DC, PoE
Video		Power consumption (max)	9.7 W
Maximum resolution *	2880 x 1620 pixels	Power consumption (Power over Ethernet (PoE))	10.7 W
Total megapixels *	5 MP	DC output voltage	12
Video compression formats	H.264, H.264+, H.265, H.265+ 1280 x 720 (HD 720), 1920 x 1080 (HD 1080), 2048 x 1280, 2304 x 1296, 2688 x 1520, 2880 x 1620	Operational conditions	
Supported graphics resolutions		Operating temperature (T-T)	-30 - 60 °C
Video recording	✓	Storage temperature (T-T)	-40 - 60 °C
Image quality adjustment	Brightness, Contrast, Mirror, Saturation, Sharpness	Operating relative humidity (H-H)	0 - 95%
Bit rate control	Constant Bit Rate (CBR)/Variable Bit Rate (VBR)	Storage relative humidity (H-H)	0 - 95%
Bit rate	Main Stream: 256 Kbps to 6 Mbps, Sub-Stream: 64 Kbps to 512 Kbps	Weight & dimensions	
Back Light Compensation (BLC)	✓	Width	74 mm
Highlight Compensation (HLC)	✓	Height	74 mm
Digital Wide Dynamic Range (DWDR)	✓	Length	184 mm
Audio		Weight	525 g
Built-in speaker(s)	✓	Packaging content	
Audio system	2-way	Number of cameras *	1
		Mounting kit	✓
		Screws included	✓
		Drilling template included	✓
		Manual	✓



1210002606370

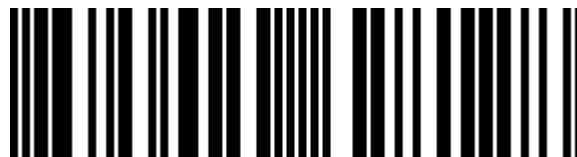

8885020628128

Catalog Object Cloud



Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.