

ZYXEL

Zyxel NWA210BE 11530 Mbit/s White Power over Ethernet (PoE)

Brand : Zyxel

Product code: NWA210BE-EU0101F


Product name : NWA210BE

- Blazingly Fast WiFi 7 Connectivity
 - Flexible BandFlex Design
 - Extended Range
 - Intelligent Cloud Networking Management
- BE12300 WiFi 7 Dual-Radio NebulaFlex Access Point
- Zyxel NWA210BE. 2.4 GHz, 5 GHz, 6 GHz, Maximum data transfer rate: 11530 Mbit/s. Security algorithms: WEP, WPA, WPA2, WPA3. Ethernet LAN data rates: 10,100,1000,2500 Mbit/s. Power over Ethernet (PoE). Product colour: White. Power consumption (max): 21.5 W



Features		Design	
2.4 GHz *	✓	Placement *	Ceiling
5 GHz *	✓	Product colour *	White
6 GHz *	✓	Housing material	Polycarbonate (PC)
Maximum data transfer rate *	11530 Mbit/s	On/off switch	✗
Maximum data transfer rate (2.4 GHz)	688 Mbit/s	Reset button	✓
Maximum data transfer rate (5 GHz)	8646 Mbit/s	WPS push button	✗
Maximum data transfer rate (6 GHz)	11530 Mbit/s	LED indicators	Data, PoE, Power, WLAN
Ethernet LAN data rates	10,100,1000,2500 Mbit/s	Antenna	
Networking standards	IEEE 802.11a, IEEE 802.11ac, IEEE 802.11ax, IEEE 802.11b, IEEE 802.11be, IEEE 802.11g, IEEE 802.11n, IEEE 802.1x	Antenna type *	Internal
		Antenna direction type	Omni-directional
Cabling technology	10/100/1000Base-T(X)	Antenna features	Integrated antenna
MIMO	✓	Antennas quantity	4
VLAN support	✓	Antenna gain level (max)	3.17 dBi
Security		Performance	
Security algorithms *	WEP, WPA, WPA2, WPA3	Built-in processor	✓
Management features		Weight & dimensions	
Web-based management	✓	Width	250 mm
Firmware upgradeable	✓	Depth	160 mm
Ports & interfaces		Height	47 mm
		Weight	815 g
Ethernet LAN (RJ-45) ports *	2	Packaging data	
USB 2.0 ports quantity *	1	Package width	279.5 mm
USB connector type	USB Type-C	Package depth	180.5 mm
WAN connection	Ethernet (RJ-45)	Package height	66 mm
RS-232 interface	✗	Package weight	1.04 kg

Ports & interfaces		Operational conditions	
DC-in jack	✓	Operating relative humidity (H-H)	10 - 95%
Power		Operating temperature (T-T)	0 - 50 °C
Power over Ethernet (PoE) *	✓	Storage temperature (T-T)	-40 - 70 °C
Power over Ethernet (PoE) type supported	Active PoE	Storage relative humidity (H-H)	10 - 90%
DC voltage range	15 V	Logistics data	
Input current	2 A	Harmonized System (HS) code	85176200
Power consumption (max)	21.5 W		

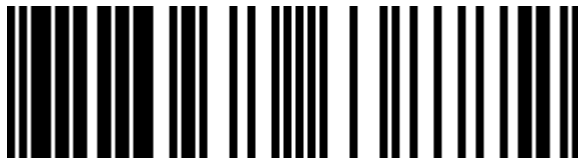

4718937638772

Catalog Object Cloud



Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.